

RUSH+ SMALL

PANORAMIC AND SPORTY

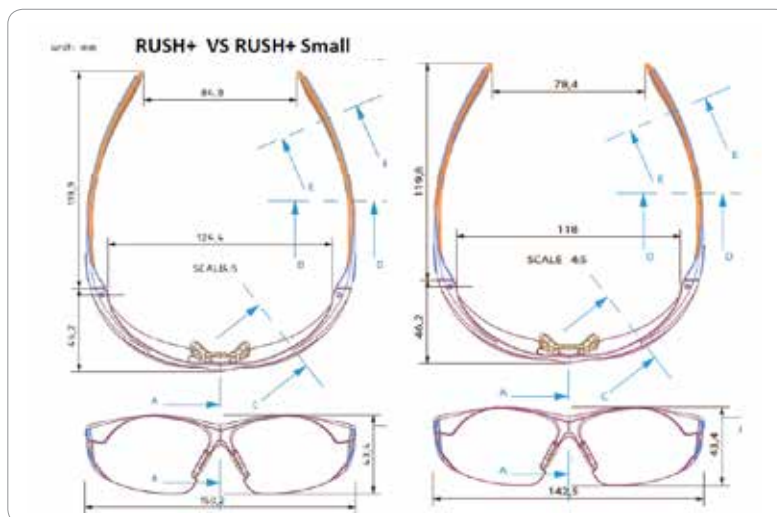
The RUSH + small adopts an ultra-sporty design, is now available in size small, for narrower faces.



RUSH+PSPI



RUSH+PSPIP



Non-slip adjustable bridge

Bi-colour & bi-material temples
 -White / Blue
 -White / Pink















 26 g

- + UPPER PROTECTION**
- + CO-INJECTED, ULTRA-FLEX, BI-COLOUR TEMPLES**
- + NON-SLIP ADJUSTABLE BRIDGE**
- +  PLATINUM® COATING (P)**

bollé
 SAFETY

RUSH+ SMALL

PANORAMIC AND SPORTY

MODEL	VERSIONS	REFERENCES	LENS MARKING	FRAME MARKING	COATINGS
RUSH+ SMALL	 Clear	 RUSHPSPSI	2C-1.2  1 FT KN 	 EN166 FT 	Anti-scratch/Anti-fog 
	 Clear	 RUSHPSPSIP	2C-1.2  1 FT KN 	 EN166 FT 	Anti-scratch/Anti-fog 

LENS MARKING

Optical class symbols:

1. Continuous work

Mechanical strength symbols:



F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s
Maximum protection for glasses.

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging



 European standard  Manufacturer name

FRAME MARKING

EN 166: guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s
Maximum protection for glasses.

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

 European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

CLEANING AND STORAGE

CLEANING: The lenses should be cleaned regularly. Bollé Safety recommends only using the B-clean lens cleaning system.

MAINTENANCE: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

STORAGE: All products must be stored in a dry and clean environment.

TECHNOLOGY

PLATINUM

This permanent coating on both sides of the lens gives them a high resistance to scratching, to the most aggressive chemicals and delays the onset of fogging.

In all circumstances and at all times the PLATINUM® lens innovation guarantees your eyes improved protection.

PACKAGING AND EAN13 CODE		
	RUSHPSPSI	RUSHPSPSIP
Individual plastic bag	3660740007454	3660740007591
10 safety spectacles per inner box	3660740107451	3660740107598
240 safety spectacles per outer pack	3660740207458	3660740207595

CHARACTERISTICS	
LENSES	PC - 2,2 mm - Curve 9
FRAME	-
TEMPLES	PC + TPR
STRAP	No
FOAM	No
SPARE LENSES	No



Non-contractual pictures

15/02/2017

Europe Bollé Safety
95 rue Louis Guérin
69100 Villeurbanne - France
Tél. : 00 33 (0) 4 78 85 23 64
Fax : 00 33 (0) 4 78 85 28 56
contact@bolle-safety.com

bolle-safety.com

U.K. Bollé Safety
Unit C83 - Barwell Business Park Leatherhead Road - Chessington
Surrey - KT9 2NY
Tél. : 00 44 (0)208 391 4700
Fax : 00 44 (0)208 391 4733
e-mail : sales@bolle-safety.co.uk

bolle
SAFETY